




# S5423 (EI 54)

20VA - Ta70°B

Dim:45x54x43,8mm

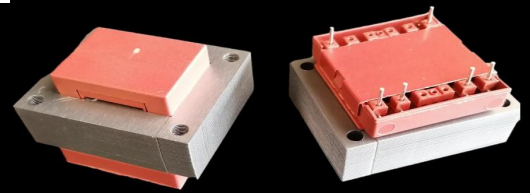


## OPEN FRAME TRANSFORMERS

[www.efiter.com](http://www.efiter.com)


[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 - External protection

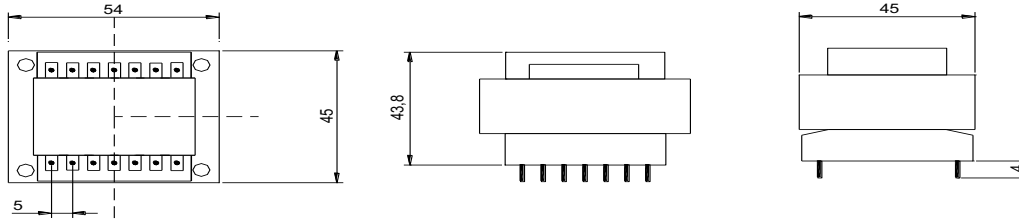


### SINGLE SECONDARY, 20VA. Ta70°B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S5423064	S5423164	4,5V	4444mA	4500mA
S5423050	S5423150	6V	3333mA	3400mA
S5423052	S5423152	7,5V	2667mA	2700mA
S5423054	S5423154	9V	2222mA	2300mA
S5423056	S5423156	12V	1667mA	1700mA
S5423058	S5423158	15V	1333mA	1400mA
S5423060	S5423160	18V	1111mA	1250mA
S5423070	S5423170	20V	1000mA	1050mA
S5423062	S5423172	24V	833mA	900mA

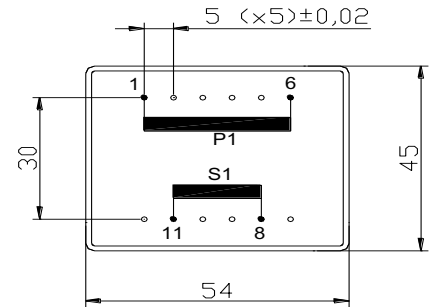


### DUAL SECONDARY, 20VA. Ta70°B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S5423065	S5423165	2x4,5V	2x2222mA	2x2300mA
S5423051	S5423151	2x6V	2x1667mA	2x1750mA
S5423053	S5423153	2x7,5V	2x1333mA	2x1400mA
S5423055	S5423155	2x9V	2x1111mA	2x1200mA
S5423057	S5423157	2x12V	2x833mA	2x900mA
S5423059	S5423159	2x15V	2x667mA	2x700mA
S5423061	S5423161	2x18V	2x556mA	2x600mA
S5423069	S5423169	2x20V	2x500mA	2x560mA
S5423063	S5423163	2x24V	2x417mA	2x500mA

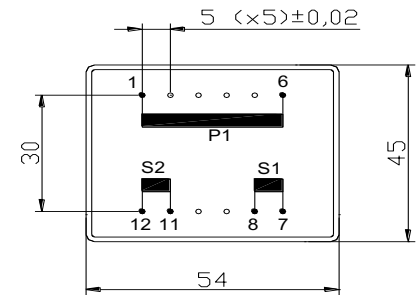

### CENTER TAPPED, 20VA. Ta70°B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S5425085	S5423185	2x4,5V	2x2222mA	2x2300mA
S5423071	S5423171	2x6V	2x1667mA	2x1750mA
S5423073	S5423173	2x7,5V	2x1333mA	2x1400mA
S5423075	S5423175	2x9V	2x1111mA	2x1200mA
S5423077	S5423177	2x12V	2x833mA	2x900mA
S5423079	S5423179	2x15V	2x667mA	2x700mA
S5423081	S5423181	2x18V	2x556mA	2x600mA
S5423089	S5423189	2x20V	2x500mA	2x560mA
S5423083	S5423183	2x24V	2x417mA	2x500mA

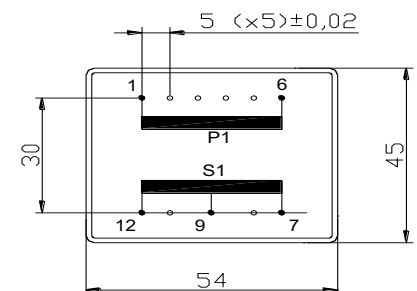

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085