




S7525 (EI 75)

70VA - Ta40°B

Dim:62x75x54,5mm

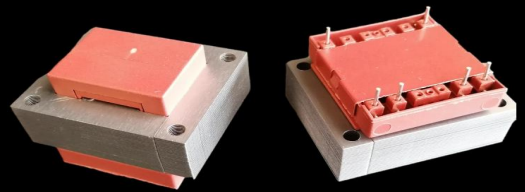


OPEN FRAME TRANSFORMERS

www.efiter.com


[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

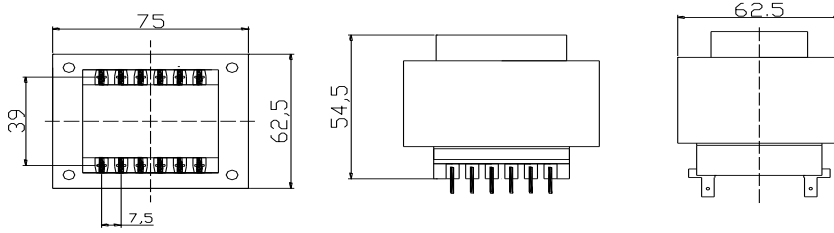


SINGLE SECONDARY, 70VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S7525014	S7525114	4,5V	15556mA	16000mA
S7525000	S7525100	6V	11667mA	12000mA
S7525002	S7525102	7,5V	93333mA	10000mA
S7525004	S7525104	9V	7778mA	8000mA
S7525006	S7525106	12V	5833mA	6000mA
S7525008	S7525108	15V	4667mA	5000mA
S7525010	S7525110	18V	3889mA	4000mA
S7525020	S7525120	20V	3500mA	3750mA
S7525012	S7525112	24V	2917mA	3000mA

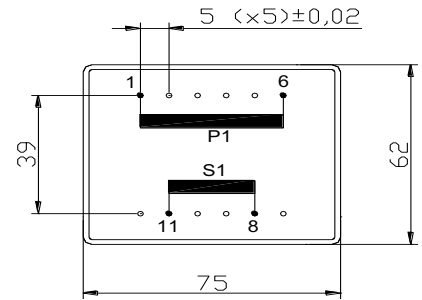


DUAL SECONDARY, 70VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S7525015	S7525115	2x4,5V	2x7778mA	2x8000mA
S7525001	S7525101	2x6V	2x5833mA	2x6000mA
S7525003	S7525103	2x7,5V	2x4667mA	2x5000mA
S7525005	S7525105	2x9V	2x3889mA	2x4000mA
S7525007	S7525107	2x12V	2x2917mA	2x3000mA
S7525009	S7525109	2x15V	2x2333mA	2x2500mA
S7525011	S7525111	2x18V	2x1944mA	2x2250mA
S7525019	S7525119	2x20V	2x1750mA	2x2000mA
S7525013	S7525113	2x24V	2x1458mA	2x1500mA

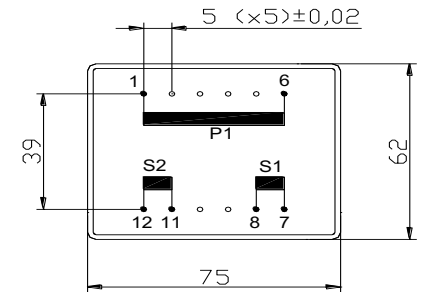

CENTER TAPPED, 70VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S7525035	S7525135	2x4,5V	2x7778mA	2x8000mA
S7525021	S7525121	2x6V	2x5833mA	2x6000mA
S7525023	S7525123	2x7,5V	2x4667mA	2x5000mA
S7525025	S7525125	2x9V	2x3889mA	2x4000mA
S7525027	S7525127	2x12V	2x2917mA	2x3000mA
S7525029	S7525129	2x15V	2x2333mA	2x2500mA
S7525031	S7525131	2x18V	2x1944mA	2x2250mA
S7525039	S7525139	2x20V	2x1750mA	2x2000mA
S7525033	S7525133	2x24V	2x1458mA	2x1500mA

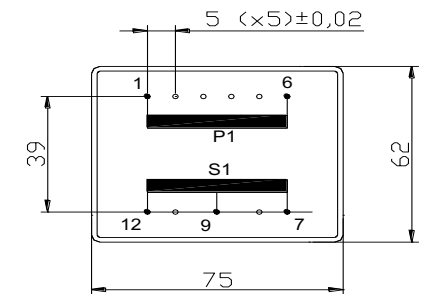

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085