




S9660 (EI 96)

200VA - Ta40°B

Dim:80x96x99,6mm



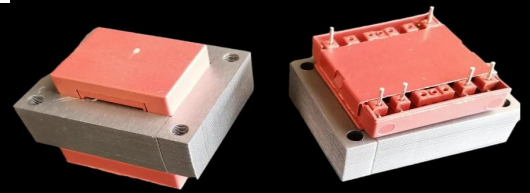


OPEN FRAME TRANSFORMERS

www.efiter.com


[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 - External protection

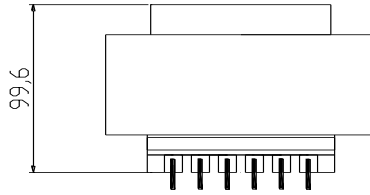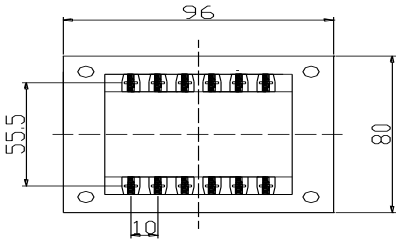


SINGLE SECONDARY, 200VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S9660014	S9660114	4,5V	44444mA	45000mA
S9660000	S9660100	6V	33333mA	35000mA
S9660002	S9660102	7,5V	26667mA	27000mA
S9660004	S9660104	9V	22222mA	23000mA
S9660006	S9660106	12V	16667mA	17000mA
S9660008	S9660108	15V	13333mA	15000mA
S9660010	S9660110	18V	11111mA	12000mA
S9660020	S9660120	20V	10000mA	12000mA
S9660012	S9660112	24V	8333mA	10000mA

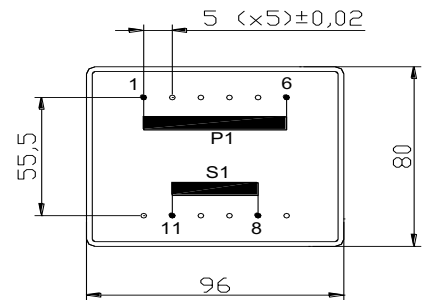


DUAL SECONDARY, 200VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S9660015	S9660115	2x4,5V	2x22222mA	2x23000mA
S9660001	S9660101	2x6V	2x16667mA	2x17000mA
S9660003	S9660103	2x7,5V	2x13333mA	2x15000mA
S9660005	S9660105	2x9V	2x11111mA	2x12000mA
S9660007	S9660107	2x12V	2x8333mA	2x9000mA
S9660009	S9660109	2x15V	2x6667mA	2x7000mA
S9660011	S9660111	2x18V	2x5556mA	2x6000mA
S9660019	S9660119	2x20V	2x5000mA	2x6000mA
S9660013	S9660113	2x24V	2x4167mA	2x5000mA

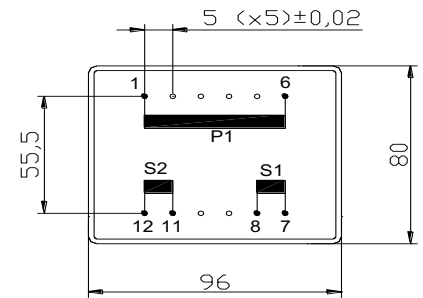

CENTER TAPPED, 200VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S9660035	S9660135	2x4,5V	2x22222mA	2x23000mA
S9660021	S9660121	2x6V	2x16667mA	2x17000mA
S9660023	S9660123	2x7,5V	2x13333mA	2x15000mA
S9660025	S9660125	2x9V	2x11111mA	2x12000mA
S9660027	S9660127	2x12V	2x8333mA	2x9000mA
S9660029	S9660129	2x15V	2x6667mA	2x7000mA
S9660031	S9660131	2x18V	2x5556mA	2x6000mA
S9660039	S9660139	2x20V	2x5000mA	2x6000mA
S9660033	S9660133	2x24V	2x4167mA	2x5000mA

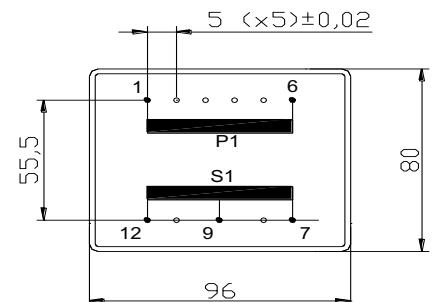

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085