



E3011 (EI 30/10,5)

1,7VA - Ta40°B

weight - 75gr.





www.efiter.com

[home>>index](#)


ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · Short circuit proof




SINGLE SECONDARY, 1,7VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,7 Vo → Is=0 Vsec → Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3011614	E3011714	4,5V	377mA	Short circuit proof
E3011600	E3011700	6V	283mA	
E3011602	E3011702	7,5V	226mA	
E3011604	E3011704	9V	188mA	
E3011606	E3011706	12V	141mA	
E3011608	E3011708	15V	113mA	
E3011610	E3011710	18V	94mA	
E3011612	E3011712	24V	70mA	

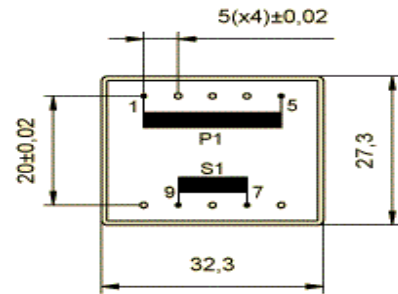


DUAL SECONDARY, 1,7VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,7 Vo → Is=0 Vsec → Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3011615	E3011715	2x4,5V	2x188mA	Short circuit proof
E3011601	E3011701	2x6V	2x141mA	
E3011603	E3011703	2x7,5V	2x113mA	
E3011605	E3011705	2x9V	2x94mA	
E3011607	E3011707	2x12V	2x70mA	
E3011609	E3011709	2x15V	2x56mA	
E3011611	E3011711	2x18V	2x47mA	
E3011613	E3011713	2x24V	2x35mA	

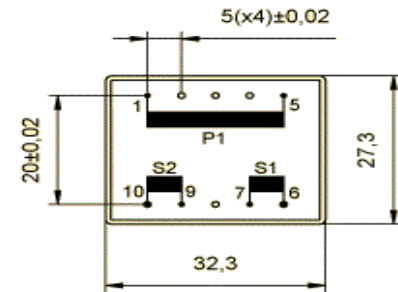

CENTER TAPPED, 1,5VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,7 Vo → Is=0 Vsec → Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3011635	E3011735	2x4,5V	2x188mA	Short circuit proof
E3011621	E3011721	2x6V	2x141mA	
E3011623	E3011723	2x7,5V	2x113mA	
E3011625	E3011725	2x9V	2x94mA	
E3011627	E3011727	2x12V	2x70mA	
E3011629	E3011729	2x15V	2x56mA	
E3011631	E3011731	2x18V	2x47mA	
E3011633	E3011733	2x24V	2x35mA	

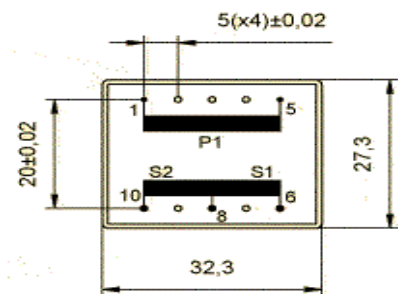

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .