



# E3013 (EI 30/12,5)

1,5VA - Ta70°B

weight - 85gr.




[www.efiter.com](http://www.efiter.com)

[home>>index](#)


## ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · Short circuit proof

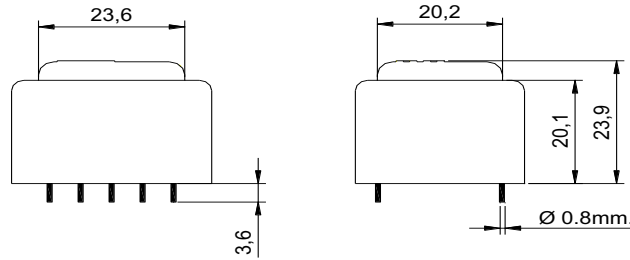


### SINGLE SECONDARY, 1,5VA. Ta70B

HR REFERENCE		Vo/Vsec=1,7 Vo --> Is=0 Vsec --> Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3013064	E3013164	4,5V	333mA	Short circuit proof
E3013050	E3013150	6V	250mA	
E3013052	E3013152	7,5V	200mA	
E3013054	E3013154	9V	166mA	
E3013056	E3013156	12V	125mA	
E3013058	E3013158	15V	100mA	
E3013060	E3013160	18V	83mA	
E3013062	E3013162	24V	62mA	

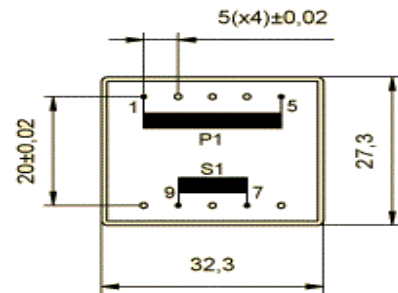


### DUAL SECONDARY, 1,5VA. Ta70B

HR REFERENCE		Vo/Vsec=1,7 Vo --> Is=0 Vsec --> Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3013065	E3013165	2x4,5V	2x166mA	Short circuit proof
E3013051	E3013151	2x6V	2x125mA	
E3013053	E3013153	2x7,5V	2x100mA	
E3013055	E3013155	2x9V	2x83mA	
E3013057	E3013157	2x12V	2x62mA	
E3013059	E3013159	2x15V	2x50mA	
E3013061	E3013161	2x18V	2x41mA	
E3013063	E3013163	2x24V	2x31mA	

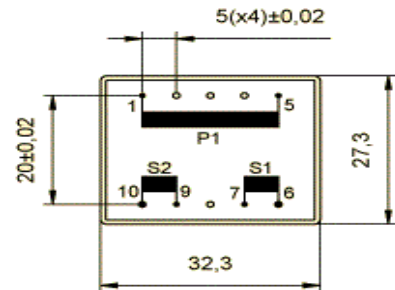

### CENTER TAPPED, 1,5VA. Ta70B

HR REFERENCE		Vo/Vsec=1,7 Vo --> Is=0 Vsec --> Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3013085	E3013185	2x4,5V	2x166mA	Short circuit proof
E3013071	E3013171	2x6V	2x125mA	
E3013073	E3013173	2x7,5V	2x100mA	
E3013075	E3013175	2x9V	2x83mA	
E3013077	E3013177	2x12V	2x62mA	
E3013079	E3013179	2x15V	2x50mA	
E3013081	E3013181	2x18V	2x41mA	
E3013083	E3013183	2x24V	2x31mA	

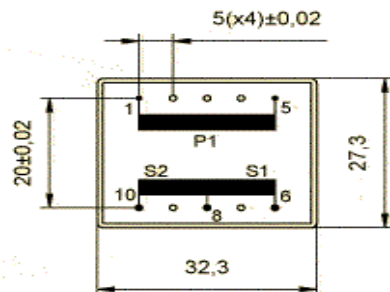

ENEC + VDE certification: Vin 230V - Vout 4,5...30V or 2x4,5V...2x15V models approved. File 40044506