



# E30/40/16,6

5VA - Ta70°B

weight - 420gr.




[www.efiter.com](http://www.efiter.com)

[home>>index](#)


## FLAT ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

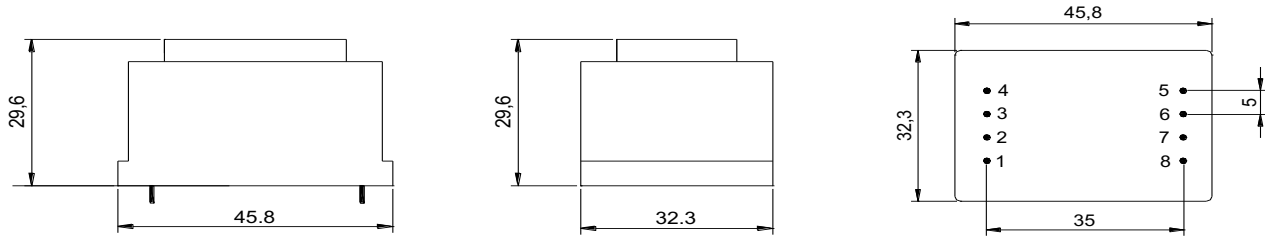

### SINGLE SECONDARY, 5VA. Ta°70B

HR REFERENCE		Vo/Vsec=1,25 Vo-->Is=0 Vsec --> Isec=In		Prot. Prim. 230V: 25mA/T 115V: 50mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E3317064	E3317114	4,5V	1111mA	1250mA
E3317050	E3317150	6V	833mA	1000mA
E3317052	E3317152	7,5V	667mA	750mA
E3317054	E3317154	9V	556mA	630mA
E3317056	E3317156	12V	417mA	500mA
E3317058	E3317158	15V	333mA	400mA
E3317060	E3317160	18V	278mA	315mA
E3317062	E3317162	24V	208mA	250mA



### DUAL SECONDARY, 5VA. Ta°70B

HR REFERENCE with fixing holes		Vo/Vsec=1,25 Vo-->Is=0 Vsec --> Isec=In		Prot. Prim. 230V: 80mA/T 115V: 160mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E3317065	E3317165	2x4,5V	2x556mA	2x630mA
E3317051	E3317151	2x6V	2x417mA	2x500mA
E3317053	E3317153	2x7,5V	2x333mA	2x400mA
E3317055	E3317155	2x9V	2x278mA	2x315mA
E3317057	E3317157	2x12V	2x167mA	2x200mA
E3317059	E3317159	2x15V	2x139mA	2x160mA
E3317061	E3317161	2x18V	2x104mA	2x125mA
E3317063	E3317163	2x24V	2x104mA	2x125mA



According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .