



E5419 (EI 54/18,8)

16VA - Ta40°B

weight - 420gr.




www.efiter.com

home>>index


ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

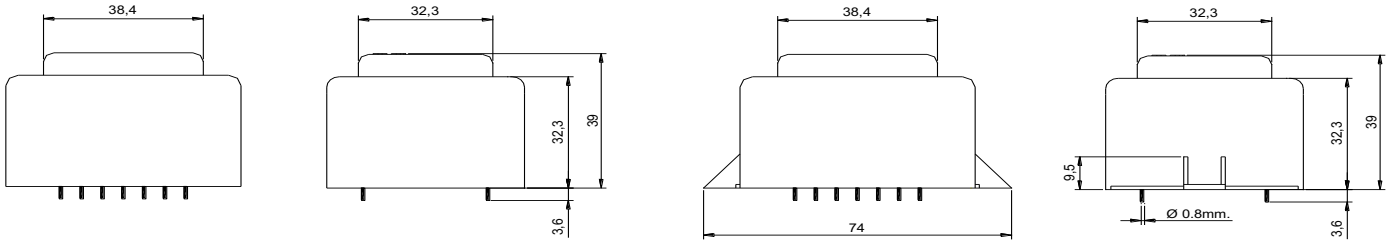


SINGLE SECONDARY, 16VA. Ta°40B

HR REFERENCE		HR REFERENCE with fixing holes		Vo/Vsec=1,25 Vo-->Is=0 Vsec --> Isec=In		Prot. Prim. 230V: 100mA/T 115V: 200mA/T
Prim. 230V	Prim. 115V	Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E5419014	E5419114	E5419514	E5419614	4,5V	3555mA	4000mA
E5419000	E5419100	E5419500	E5419600	6V	2666mA	3150mA
E5419002	E5419102	E5419502	E5419602	7,5V	2133mA	2500mA
E5419004	E5419104	E5419504	E5419604	9V	1777mA	2000mA
E5419006	E5419106	E5419506	E5419606	12V	1333mA	1600mA
E5419008	E5419108	E5419508	E5419608	15V	1066mA	1250mA
E5419010	E5419110	E5419510	E5419610	18V	888mA	1000mA
E5419012	E5419112	E5419512	E5419612	24V	666mA	800mA

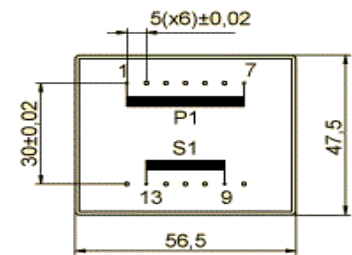


DUAL SECONDARY, 16VA. Ta°40B

HR REFERENCE		HR REFERENCE with fixing holes		Vo/Vsec=1,25 Vo-->Is=0 Vsec --> Isec=In		Prot. Prim. 230V: 100mA/T 115V: 200mA/T
Prim. 230V	Prim. 115V	Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E5419015	E5419115	E5419515	E5419615	2x4,5V	2x1777mA	2x2000mA
E5419001	E5419101	E5419501	E5419601	2x6V	2x1333mA	2x1600mA
E5419003	E5419103	E5419503	E5419603	2x7,5V	2x1066mA	2x1250mA
E5419005	E5419105	E5419505	E5419605	2x9V	2x888mA	2x1000mA
E5419007	E5419107	E5419507	E5419607	2x12V	2x666mA	2x800mA
E5419009	E5419109	E5419509	E5419609	2x15V	2x533mA	2x630mA
E5419011	E5419111	E5419511	E5419611	2x18V	2x444mA	2x500mA
E5419013	E5419113	E5419513*	E5419613	2x24V	2x333mA	2x400mA

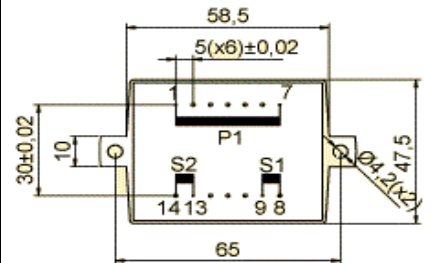

CENTER TAPPED, 16VA. Ta°40B

HR REFERENCE		HR REFERENCE with fixing holes		Vo/Vsec=1,25 Vo-->Is=0 Vsec --> Isec=In		Prot. Prim. 230V: 100mA/T 115V: 200mA/T
Prim. 230V	Prim. 115V	Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E5419035	E5419135	E5419535	E5419635	2x4,5V	2x1777mA	2x2000mA
E5419021	E5419121	E5419521	E5419621	2x6V	2x1333mA	2x1600mA
E5419023	E5419123	E5419523	E5419623	2x7,5V	2x1066mA	2x1250mA
E5419025	E5419125	E5419525	E5419625	2x9V	2x888mA	2x1000mA
E5419027	E5419127	E5419527	E5419627	2x12V	2x666mA	2x800mA
E5419029	E5419129	E5419529	E5419629	2x15V	2x533mA	2x630mA
E5419031	E5419131	E5419531	E5419631	2x18V	2x444mA	2x500mA
E5419033	E5419133	E5419533*	E5419633	2x24V	2x333mA	2x400mA

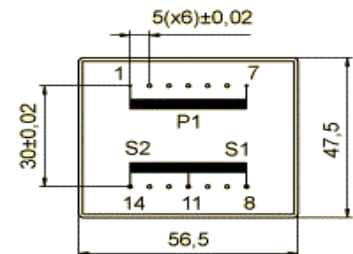

ENEC + VDE certification: Vin 230V - Vout 4,5...36V or 2x4,5V...2x18V models approved. File 40044901