



U3017 (UI 30/16,5)

10VA - Ta40°C

8VA - Ta70°C





www.efiter.com

weight - 270gr.

ENCAPSULATED TRANSFORMERS


home>>index

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 - External protection

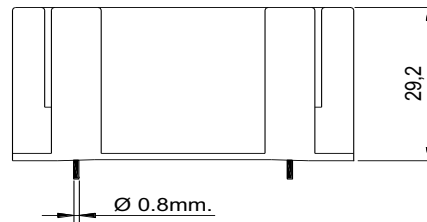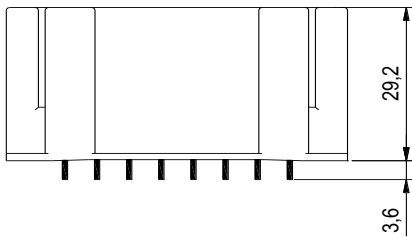


10VA. Ta40°C

HR REFERENCE		Vo/Vsec=1,45 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 63mA/T 115V: 125mA/T
U30170xx	U30175xx	Vsec	Isec	Prot. Sec. mA/F
U3017007	U3017507	2x4,5V	2x1111mA	2x1250mA
U3017000	U3017500	2x6V	2x833mA	2x1000mA
U3017001	U3017501	2x7,5V	2x666mA	2x800mA
U3017002	U3017502	2x9V	2x555mA	2x630mA
U3017003	U3017503	2x12V	2x416mA	2x500mA
U3017004	U3017504	2x15V	2x333mA	2x400mA
U3017005	U3017505	2x18V	2x277mA	2x315mA
U3017006	U3017506	2x24V	2x208mA	2x250mA

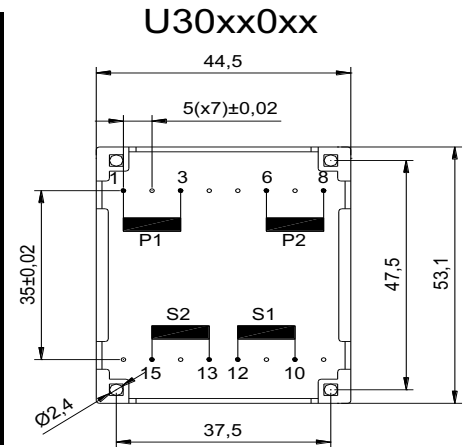



8VA. Ta70°C

HR REFERENCE		Vo/Vsec=1,45 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 63mA/T 115V: 125mA/T
U30170xx	U30175xx	Vsec	Isec	Prot. Sec. mA/F
U3017057	U3017557	2x4,5V	2x888mA	2x1000mA
U3017050	U3017550	2x6V	2x666mA	2x800mA
U3017051	U3017551	2x7,5V	2x533mA	2x630mA
U3017052	U3017552	2x9V	2x444mA	2x500mA
U3017053	U3017553	2x12V	2x333mA	2x400mA
U3017054	U3017554	2x15V	2x266mA	2x315mA
U3017055	U3017555	2x18V	2x222mA	2x250mA
U3017056	U3017556	2x24V	2x166mA	2x200mA


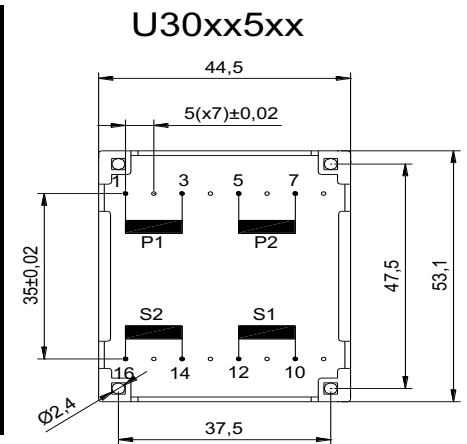


Primary connections

Secondary connections

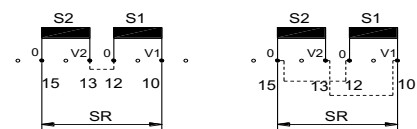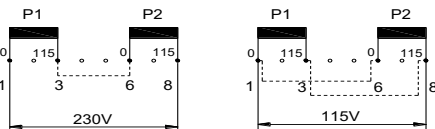

U30170xx

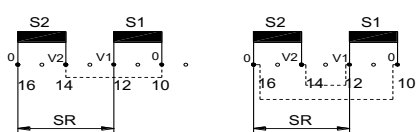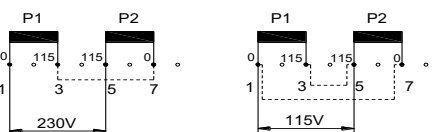

U30175xx

Vsr=V1+V2
Isr=I1

Vsr=V1
Isr=I1+I2

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085.